

Since 1993,

STAR YAGCILAR has started manufacturing of semi-trailers, trailers and truck tippers.

STAR YAGCILAR continues to grow with its customers with the experience which it has gained in a short time and with the trust and strength of developing and implementing its targets.

STAR YAGCILAR thanks to its qualified workers and state of the-art machine park, provides high quality manufacturing processes in its production.

STAR YAGCILAR provides a systematic traceability with its large investments in quality, makes production in a way that never compromises on quality in all processes from raw materials input to output of products.

STAR YAGCILAR is located in IZMIR which is the third biggest city in Turkey. Izmir has the biggest port in Turkey which is 17 km away from our Company.

The headquarter of STAR YAGCILAR 38000 m2 is located in KEMALPAŞA/IZMIR Industrial Zone.

18 000m2 Opened area, 20000 m2 closed production area.

CERTIFICATES
























6,70 HALF PIPE SEMI TRAILER





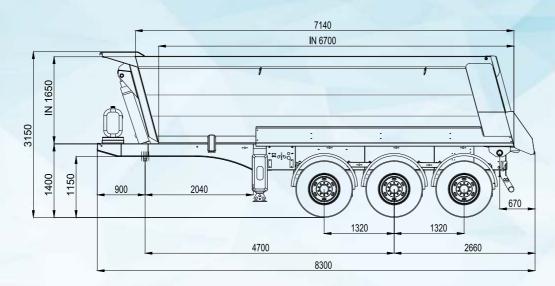



Description

Volume	24 m³	
Axles Group Capacity	27.000 - 36.000 Kg	
Net Weight	+/- 6.800 - 7.000 Kg	

Body Parts

St 52 Steel High Quality
Yes
Yes
Yes
Hardox 450
Mechanic
Yes
Yes 30 Lt
Yes
Yes - Aluminum
Yes

Axles

Brands	SAF
Axles	3
Suspension	Air / Mechanic
Lifting Axles	2 Axles Lifting (1 Possible)
Tyre Size	385 / 65 R 22.5 / 6+1 Piece
Tyre Brand	Good Year (Equivalent)
Brakes	Disc / Drum

Case

Bottom Plate	5 mm - HARDOX 450
Side Wall Plate	4 mm - HARDOX 450
Front Wall Plate	4 mm - HARDOX 450
Rear Door Plate	4 mm - HARDOX 450

Systems

Paint

Cylinder Brand	Tipper movement is provided by level 5 or 6 stages heavy telescopic cylinder HIDROMAS brand.	
Pomp Oper	rating Pressure	170 Bar
Maximum Pressure		190 Bar
Oil Tank Capacity		200 Lt
Electric System	Sa-Ba or Sertplas brand 2×7 pin sockets -24V, lights accord to standard in SAE rear stop lamps, side marker lamps,bral safety warning lamps and signal light fitted at the rear	

Landing Legs	Heavy Duty execution 2 - speed	
Brake system	WABCO - ABS - EBS braking system	

chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

Before the painting, the body is washed with special

All painting applications are made in the painting cabin.

Alternative Systems

Volumes	20 m ³ / 22 m ³ / 27 m ³ /30 m ³	
Cases Materials	HARDOX 450-St 52-Domex	
Number of Axles	2, 3 axles	
Tyres	Single or Double	
Rear Door System	Hydraulic, Mechanic	
Cylinder Brand	Tipper movement is provided by level 4 or 5 stages heavy telescopic cylinder brand certificated HYVA type brand.	
Thickness	Side doors can be be 4, 5, 6 mm and bottom plate will be 4,5,6,8 mm thickness.	
Axles Brand	BPW - OSMAN KOÇ - TRAX	
Tarpaulin	Hydraulic / Manual (Optional)	


King Pin


Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.



SC.50 T SCRAP TRAILER





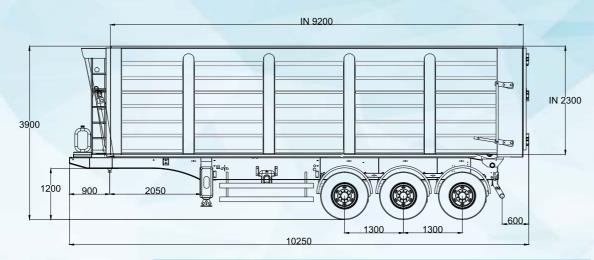

4 1 1	

Description Volume

Axles Group Capacity

Body Parts

Net Weight

50 m³
36.000 Kg
+/- 9.000 Kg

Systems

Cylinder Brand	Tipper movement is provided by level 5 or 6 stages heavy telescopic cylinder HIDROMAS brand.
Pomp Operating Pressure	170 Bar
Maximum Pressure	190 Bar
Oil Tank Capacity	200 Lt

Electric System Sa-Ba or Sertplas brand 2×7 pin sockets - 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear

Brake system

WABCO -ABS - EBS braking system

Paint

Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

All painting applications are made in the painting cabin.

Chassis St 52 Steel High Quality Spare wheel Yes Tool box Yes Spare wheel holder Yes Case Material Hardox 450 Rear Door System Mechanic Mudguard Yes Yes 30 Lt Water Tank Fire Extinguisher Yes Side Protection Barrier Yes - Aluminum Yes Ladder

Axles

Brands	OSMAN KOÇ	Lifting Axles	2 Axles Lifting (1 Possible)
Axles	3 x 12 Ton	Tyre Size	385 / 65 R 22.5 / 6+1 Piece
Suspension	Air / Mechanic	Brakes	Disc / Drum

Alternative Systems

Volumes	30 m³ - 40 m³ - 50 m³	
Cases Materials	HARDOX 450-St 52-Domex	
Number of Axles	2,3 axles	
Rear Door System	Hydraulic, Mechanic	
Cylinder Brand	Tipper movement is provided by level 5 or 6 stages heavy telescopic cylinder brand certificated HYVA type Hidromas brand.	
Chassis Thickness	Side doors can be be 4, 5, 6 mm and bottom plate will be 4,5,6,8 mm thickness.	
Axles Brand	SAF-BPW-TRAX	
Tarpaulin	Hydraulic / Manual (Optional)	

Case

Bottom Plate	5 mm - HARDOX 450	Front Wall Plate	4 mm - HARDOX 450
Side Wall Plate	4 mm - HARDOX 450	Rear Door Plate	4 mm - HARDOX 450

King Pin


Dimension

Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" k ing pin detachable from below made by SAE standards 8 bolt type. With E certificate.



HIGH CUP EXTENDABLE TRAILER



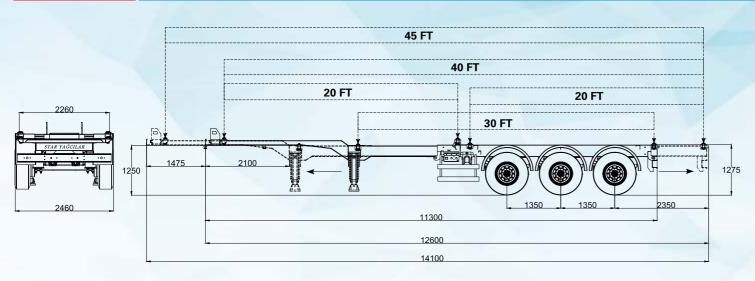



Description

Load Sizes	20' 30' 40' 45' FEET container
Axles Capacity	27.000 Kg
Net weight	+/- 5.300 Kg

Axles

Brands	SAF
Axles	3 x 9 Ton
Suspension	Air / Mechanic
Lifting Axles	2 Axles Lifting (1 Possible)
Tyre size	385/65 R22.5 / 6+1 Piece
Tyre Brand	Good Year (Equivalent)
Brakes	Disc / Drum

Alternative Systems

Number of Axles	2,3 axles
Axles Brand	BPW - OSMAN KOÇ - TRAX
Chassis	Fixed

Chassis Description

Chassis

Front frame mechanically extendable, Rear frame pneumatically. Necessary twistable and raisable twistlocks and support bars extendable with tractor

Body Parts

Chassis	St 52 Steel High Quality
Spare wheel	Yes
Tool box	Yes
Spare wheel holder	Yes
Lockings	Manual mechanically at left and right side - 2 wheelbase positions
Mudguard	Yes
Water Tank	Yes 30 Lt
Fire Extinguisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes

Systems

Electric System	Sa-Ba or Sertplas brand 2×7 pin sockets – 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear
Brake System	WABCO -ABS - EBS braking system
Extension System	Pneumatic
Lighting System	2x2 round LED rear lights-2x1 round LED fog light-2x1 round LED reverse light-LED side lighting-Conform EU-regulations
Landing Legs 24 Tons	Heavy Duty execution 2-speed

Paint

Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

All painting applications are made in the painting cabin.

King Pin

Dimension

Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.


FLATBED TRAILER




STAR® YAĞCILAR R

STR / FLATBED TRAILER





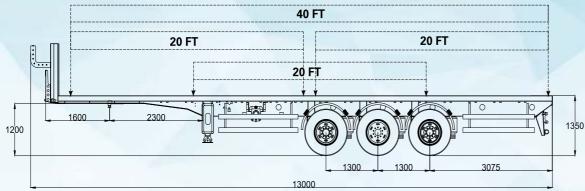



Description

Load Sizes	20' 30' 40' FEET container sizes
Axles Capacity	27.000 Kg
Net weight	+/- 5.500 Kg

Axles

Brands	SAF
Axles	3 x 9 Ton
Suspension	Air / Mechanic
Lifting Axles	2 Axles Lifting (1 Possible)
Tyre size	385/65 R22.5 / 6+1 Piece
Tyre Brand	Single / Double
Brakes	Disc / Drum

Alternative Systems

Number of Axles	2, 3 Axles
Axles Brand	SAF - BPW - TRAX
Chassis	Skelet Type

Chassis Description

Bottom	
Plate	

Durable to 7.000 kg forklift axle load and covered with 30 mm plywood panel or 4/5 diamond embossed sheet on platform

Body Parts

Chassis	St 52 Steel High Quality
Spare wheel	Yes
Tool box	Yes
Spare wheel holder	Yes
Twist Lock	Yes
Mudguard	Yes
Water Tank	Yes 30 Lt
Fire Extinguisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes

Systems

Electric System	Sa-Ba or Sertplas brand 2×7 pin sockets – 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear
Brake System	WABCO -ABS - EBS braking system
Lighting System	2x2 round LED rear lights-2x1 round LED fog light-2x1 round LED reverse light-LED side lighting-Conform EU-regulations
Landing Legs 24 Tons	Heavy Duty execution 2-speed
Refere the pointing the body is washed with special chemicals to purify the	

Paint

Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

All painting applications are made in the painting cabin.

King Pin

Dimension

Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.

13.60 SEMI TRAILER






13.60 SEMI TRAILER





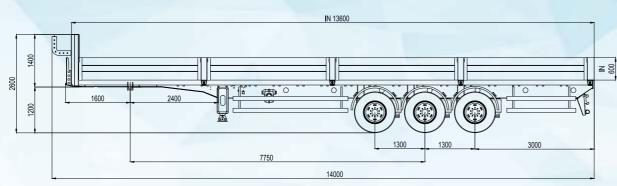



Description

Platform Lenght	13.500 mm
Axles Capacity	36.000 Kg
Net Weight	+/- 6.000 Kg

Axles

7 5 10 5 5	
Brands	OSMAN KOÇ
Axles	3 x 12 Ton
Suspension	Air / Mechanic (optional)
Lifting Axles	2 Axles Lifting (1 Possible)
Tyre	Single / Double
Tyre Brand	Good Year (Equivalent)
Brakes	Disc / Drum

Alternative Systems

Number of Axles	2, 3 axles
Axles Brand	SAF-BPW-TRAX

Body Parts

Chassis	St 52 Steel High Quality
Spare wheel	Yes
Tool box	Yes
Spare wheel holder	Yes
Side walls, and a front wall	Aluminum
Mudguard	Yes
Water Tank	Yes 30 Lt
Fire Extinquisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes

Chassis Description

Chassis	Made of high quality and high strength ST52 steel, in compliance with Standard ISO 1726-2; made of two welded longitudinal beams in "I" form with cross beams at needed distances.
Floor	Phenol resin coated, 30mm thick and water resistant plywood flooring that can support 5.460 kg forklift axle load in compliance with DIN EN 283

Systems

Electric System Sa-Ba or Sertplas brand 2×7 pin sockets – 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear

Brake System	WABCO - ABS - EBS Braking System
Lighting System	2x2 round LED rear lights-2x1 round LED fog light-2x1 round LED reverse light-LED side lighting-Conform EU-regulations
Landing Legs 24 Tons	Heavy Duty execution 2-speed
Paint	Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body. All painting applications are made in the painting cabin.


King Pin

Dimension	Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.
King Pin Capacity	12.000 Kg



13.60 CURTAIN SIDE TRAILER



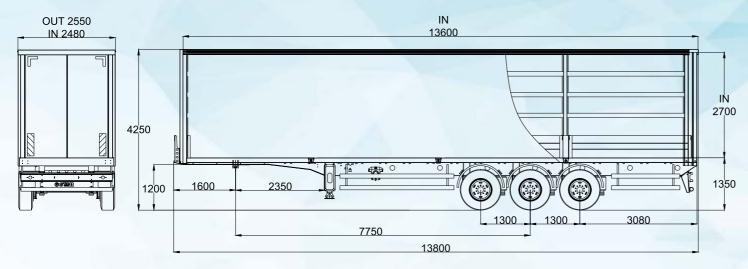



Description

Platform Lenght	13.600 mm
Axles Capacity	36.000 Kg
Net Weight	+/- 6400 Kg

Axles

OSMAN KOÇ
3 x 12 Ton
Air
2 Axles Lifting (1 Possible)
Optional
385 / 65 R 22.5
Good Year (Equivalent)
Drum / Disc

Alternative Systems

Number of Axles	2, 3 axles
Axles Brand	SAF - BPW - TRAX

Body Parts

Chassis	St 52 Steel High Quality
Spare wheel	Yes
Tool box	Yes
Spare wheel holder	Yes
Front walls, and a front wall	Aluminum
Mudguard	Yes
Water Tank	Yes 30 Lt
Fire Extinguisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes

Chassis Description

Chassis	Made of high quality and high strength ST52 steel, in compliance with Standard ISO 1726-2; made of two welded longitudinal beams in "I" form with cross beams at needed distances.
Floor	Phenol resin coated, 30mm thick and water resistant plywood flooring that can support 5.460 kg forklift axle load in compliance with DIN EN 283

Systems

Electric
System

Sa-Ba or Sertplas brand 2×7 pin sockets – 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear

Brake System	WABCO - ABS - EBS Braking System	
Lighting System	2x2 round LED rear lights-2x1 round LED fog light-2x1 round LED reverse light-LED side lighting-Conform EU-regulations	
Landing Legs 24 Tons	Heavy Duty execution 2-speed	

Paint

Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

All painting applications are made in the painting cabin.

Roof Type	One-way sliding roof system is included
Front Panel Type	KTL coated steel panel and 1.220 mm plywood protection plate

King Pin

Dimens


CION	Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.
------	---

King Pin Capacity 12.000 Kg



LOWBED TRAILER



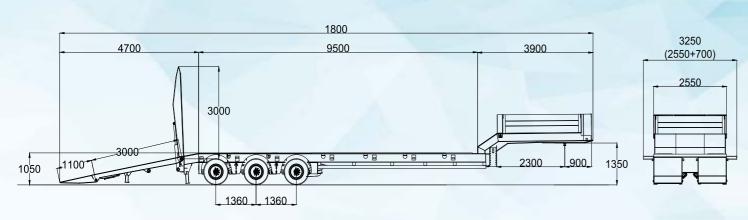



Description

Platform Lenght	9.500 mm
Axles Capacity	36.000 Kg
Net Weight	+/- 11.000 Kg

ΔνΙρς

ANIUS	
Brands	OSMAN KOÇ
Axles	3 x 12 Ton
Suspension	Air / Mecanical
Lifting Axles	2 Axles Lifting (1 Possible)
Tyre	Single / Double
Tyre Brand	Good Year (Equivalent)
Brakes	Disc / Drum

Alternative Systems

Number of Axles	2, 4, 5 Axles
Axles Brand	SAF - BPW - TRAX
Chassis	Extendable

Body Parts

Chassis	St 52 Steel High Quality
Spare wheel	Yes
Tool box	Yes
Spare wheel holder	Yes
Mudguard	Yes
Water Tank	Yes 30 Lt
Fire Extinquisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes

Platform Description

Floor And Gooseneck The middle part will be made of 4/5 or a material made from patterned sheet . sides 80 mm wooden black larch (2 mm). Made of (ST 37) quality sheet material 600 mm. will be manufactured with a cover at the height.Gooseneck platform (2 mm).(ST 37) made of quality steel material optional 500 mm high closed construction.

Systems

Electric System Sa-Ba or Sertplas brand 2×7 pin sockets – 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear

Brake System	WABCO - ABS - EBS Braking System
Ramps Legs	Hydraulic Foldable legs, 45 ton static capacity
Lighting System	2x2 round LED rear lights-2x1 round LED fog light-2x1 round LED reverse light-LED side lighting-Conform EU-regulations
Landing Legs 24 Tons	Heavy Duty execution 2-speed

Paint

Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

All painting applications are made in the painting cabin.

King Pin


Dimension

Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.



LM 01 PORT TRAILER



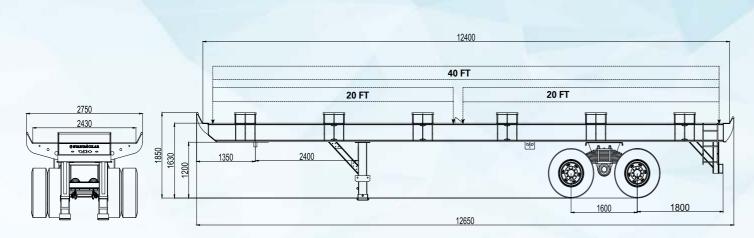



Description

Load Sizes	20' 40' FEET container sizes
Load capacity	80.000 Kg
Net weight	+/- 11.000 Kg

Axles

Brands	MUSTAFA CEYLAN
Axles	2 x 40 Ton
Suspension	Spring
Tyre size	INDUSTRIAL type inflatable tires produced with tubeless steel radial or V.PLY technology in dimensions of 310 / 80R22,5.
Tyre Brand	CONTINENTAL
Brakes	Drum / Disc

Body Parts

Chassis	HEB 400
Spare wheel	Yes
Tool box	Yes
Spare wheel holder	Yes
Twist Lock	Manual mechanically at left and right side - 2 wheelbase positions
Mudguard	Yes
Water Tank	Yes 30 Lt
Fire Extinguisher	Yes
Wheel Shocks	Yes

Chassis Description

Plate

The sheet metal parts used consist of St52 quality and King pin plate plate HARDOX 450 Wear Plate.

Alternative Systems

Number of Axles	2, 3 axle
Axles Brand	SAF - BPW - TRAX

King Pin

Dimension

Jost or equivelent Turkish brand DIN 74080 standards 2" or 3,5" king pin detachable from below made by SAE standards 8 bolt type. With E certificate.

Systems

Electric System	Sa-Ba or Sertplas brand 2×7 pin sockets - 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear
Brake system	WABCO -ABS - EBS braking system
Lighting System	2x2 round LED rear lights-2x1 round LED fog light-2x1 round LED reverse light-LED side lighting-Conform EU-regulations
Landing Legs	Heavy Duty execution 2-speed
Defect the nainting the hady is weeked with enecial	

Paint


Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body.

All painting applications are made in the painting cabin.



28 m TIPPER TRUCK



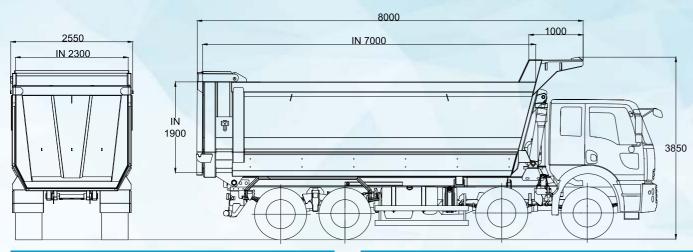

DescriptionVolume28 m³Load Capacity48.000 KgUnloading Angle45 - 50 Degrees

Mudguards Yes - Plastic os Steel Tool box Spare wheel holder Water Tank Yes 30 Lt Fire Extinguisher Side Protection Barrier Wheel Shocks Yes - Aluminum Yes	Standard Accessories	
Spare wheel holder Water Tank Yes 30 Lt Fire Extinguisher Side Protection Barrier Yes - Aluminum	Mudguards	Yes - Plastic os Steel
Water Tank Fire Extinguisher Side Protection Barrier Yes 30 Lt Yes Yes Yes - Aluminum	Tool box	Yes
Fire Extinguisher Side Protection Barrier Yes Yes - Aluminum	Spare wheel holder	Yes
Side Protection Barrier Yes - Aluminum	Water Tank	Yes 30 Lt
	Fire Extinguisher	Yes
Wheel Shocks Yes	Side Protection Barrier	Yes - Aluminum
	Wheel Shocks	Yes
Ladder	Ladder	Yes

Case	
Side Wall	8 mm thickness HARDOX 450
Floor	10 mm thickness HARDOX 450
Front Wall	8 mm thickness HARDOX 450
Rear Door	8 mm thickness HARDOX 450

Hydraulic system		
Hydraulic Cylinder	155 x 4 x 4100 Cylinder (Hidromas)	
Oil Tank	120 Lt	
Total Oil Capacity	230 Lt	
Max. PRessure	330 bars	
Hydraulic Pump	Hidromas	
PTO	Orginal vehicle PTO will be mounted	



General Description	
Body	Very strong body structure. Body reinforced designed to work in heavy duty conditions.
Tipper Chassis	High Quality st 52 "U" Shape
Rear Door Mechanism	Hydraulic
Tarpaulin	Optional
Painting	Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body. All painting applications are made in the painting cabin.

Alternative System			
Truck	6 x 4	8 x 4	
Volume	14 m3 - 16 m3 - 18 m3 - 20 m3	20 m3 - 22 m3 - 24 m3 - 26 m3	


48 M SCRAP TIPPER



48 M SCRAP TIPPER





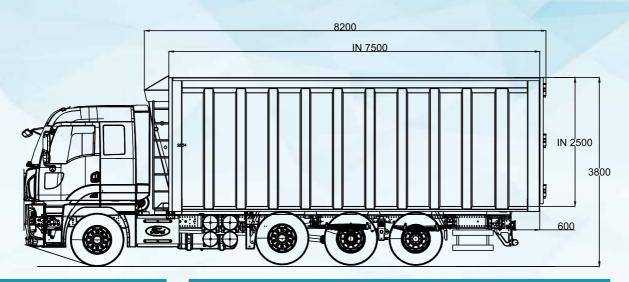

Description	
Volume	48 m ³
Load Capacity	32.000 Kg
Unloading Angle	45 - 50 Degrees

Standard Accessories	
Mudguards	Yes - Plastic os Steel
Tool box	Yes
Spare wheel holder	Yes
Water Tank	Yes 30 Lt
Fire Extinguisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes
Ladder	Yes

Case		
5 mm St 52		
6 mm St 52		
5 mm St 52		
5 mm St 52		

Hydraulic system	
Hydraulic Cylinder	155 x 4 x 4100 Cylinder (Hidromas)
Oil Tank	120 Lt
Total Oil Capacity	230 Lt
Max. PRessure	330 bars
Hydraulic Pump	Hidromas
PTO	Orginal vehicle PTO will be mounted
	Hydraulic Cylinder Oil Tank Total Oil Capacity Max. PRessure Hydraulic Pump

Alternative System	
Volume	14 m3 - 16 m3 - 18 m3 - 20 m3
Tarpaulin	Hydraulic or mechanic (optional)




General Description		
Body	Very strong body structure. Body reinforced designed to work in heavy duty conditions.	
Tipper Chassis	St 52 "U" Shape	
Rear Door Mechanism	Hydraulic	
Tarpaulin	Optional	
Painting	Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body. All painting applications are made in the painting cabin.	
Rear Door Mechanism	Side rear door system	



HL-16T HOOKLIFT



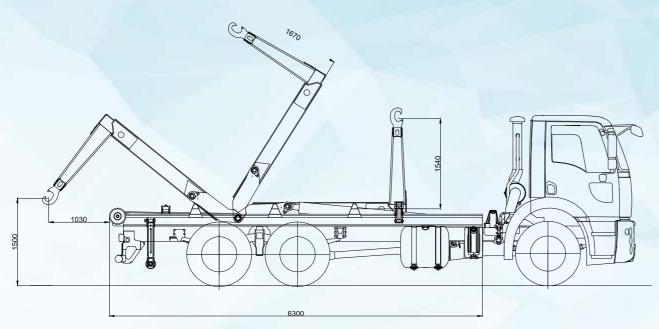



Description

the second secon	
Hook - Lift	6 x 2 Truck
Load Capacity	16.000 Kg
Unloading Angle	45 - 50 Degrees

Standard Accessories	
Chassis	St 52 Steel High Quality
Mudguards	Yes - Plastic os Steel
Tool box	Yes
Spare wheel holder	Yes
Reflektor on side and hook	Yes
Water Tank	Yes 30 Lt
Fire Extinguisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes

Hook-Lift Boom	
Boom	14 mm. Thickness ST 52
Boom Arm	14 mm. Thickness ST 52
Boom Storage	14 mm. Thickness ST 52
Boom Height	1600 mm


Hook-Lift Hydraulic System	
Hydraulic Cylinder	180x220/ 2 pieces lifting cylinder, 120x140 1 piece sürme cylinder (ST52 cold-drawn)
Oil Tank	120 Lt
Total Oil Capacity	230 Lt
Max. Pressure	330 Bars
Hydraulic Pump	Hidromas make / 85 lt. Axles pump
PTO	Orginal vehicle PTO will be mounted.

Chassis Description	
Rear Rollers	The material: G 550 steel casting
Operating System	Manual and remote controlwith DIN EN 283
Locking Mechanism	Hydraulic lock locks the container chassis to hook-lift chassis.
Painting	Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body. All painting applications are made in the painting cabin.



HL - 25T HOOKLIFT



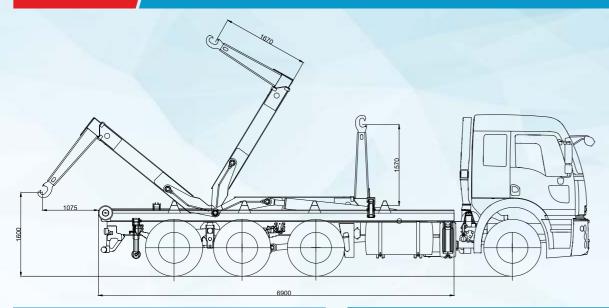



Description

Hook - Lift	8 x 2 Truck
Load Capacity	25.000 Kg
Unloading Angle	45 - 50 Degrees

Hook-Lift Boom

Boom	14 mm. Thickness ST 52
Boom Arm	14 mm. Thickness ST 52
Boom Storage	14 mm. Thickness ST 52
Boom Height	1600 mm

Chassis Description

Rear Rollers	The material: G 550 steel casting
Operating System	Manual and remote controlwith DIN EN 283
Locking Mechanism	Hydraulic lock locks the container chassis to hook-lift chassis.
Paint	Before the painting, the body is washed with special chemicals to purify the waste materials and cleaned by sand blasting method. After the pasting on the necessary surfaces of the body, the two-coat epoxy primer and two-coat water-based paint is applicated on the body. All painting applications are made in the painting cabin.

Hook-Lift Hydraulic System

Hydraulic Cylinder	180x220 / 2 pieces lifting cylinder, 120x140 1 piece sürme cylinder (ST52 cold-drawn)
Oil Tank	120 Lt
Total Oil Capacity	230 Lt
Max. Pressure	330 Bars
Hydraulişc Pump	Hidromas make / 85 lt. Axles pump
PTO	Orginal vehicle PTO will be mounted.

Standard Accessories

Chassis	St 52 Steel High Quality
Mudguards	Yes - Plastic or Steel
Fool box	Yes
Spare wheel holder	Yes
Reflektor on side and hook	Yes
Vater Tank	Yes 30 Lt
Fire Extinguisher	Yes
Side Protection Barrier	Yes - Aluminum
Wheel Shocks	Yes





- **1** +90 232 887 12 54 +90 232 887 12 55 +90 232 375 50 76 - Faks
- izmir Ankara Asfaltı 27. Km Sütçüler Mevkii K.O.S.B. Kemalpaşa - İZMİR - TÜRKİYE
- info@staryagcilar.com.tr
- www.staryagcilar.com.tr







www.kosgeb.gov.tr Altındağ Matbaası / 0.232 457 58 33 Mersinli Mahallesi 2839 Sokak No: 28 1. Sanayi Sitesi Konak - İZMİR tarafından 01.05.2018 tarihinde 1.000 adet basılmıştır.